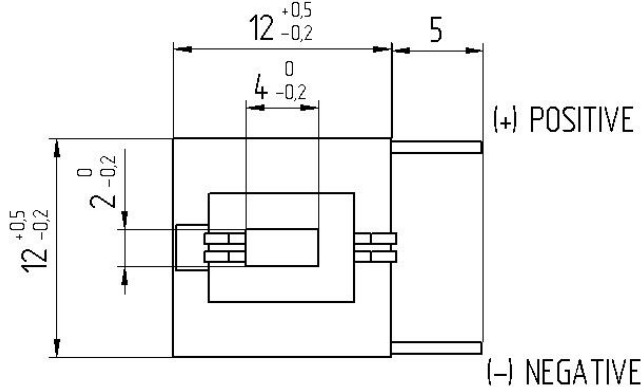
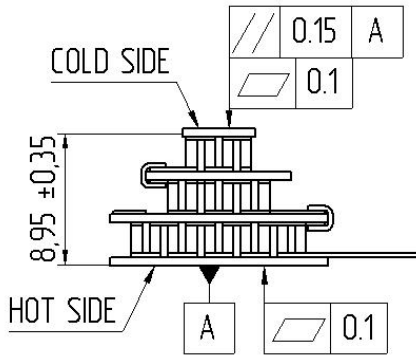
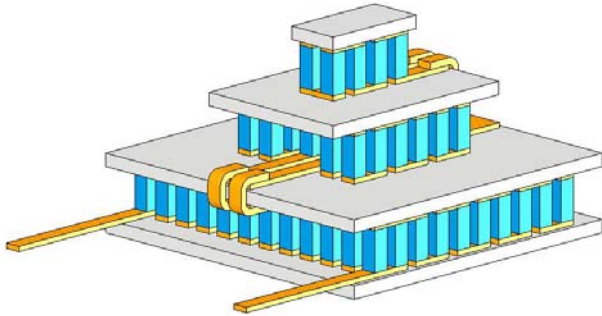


SPECIFICATION OF THERMOELECTRIC MODULE TB-3-(59-17-4)-1.5


Thermoelectrical parameters	Unit	Value
I_{max}	Amps	1
U_{max}	Volts	6.8
ΔT_{max}	K	114
Q_{max}	Watts	0.5
Tolerance	%	±10

All parameters except R_{ac} are given at Th=300 K

Assembly parameters	Unit	Value
Wires	-	-
Cross section	mm²	-
Metallization		Not
Sealing		Not
Internal solder	°C	139
Brazing solder	°C	not

Operational parameters	Unit	Value
Working temperature range	°C	-50 ÷ +80
Max. processing temperature	°C	130
ROHS compliance		YES

