


REV.	DATE	DESCRIPTION	BY
1.0	Apr/29/13'	D2819	Eve

DATE :	Apr/28/13'
P/N :	B0106438
Dwg NO. :	A07183
CUST. P/N :	MDR26P-MDR26P-0300-00
CUSTOMER :	
DESCRIPTION	MDR26P-MDR26P-0300-00
APPROVE:	

CONFIGURATION

END A

END B

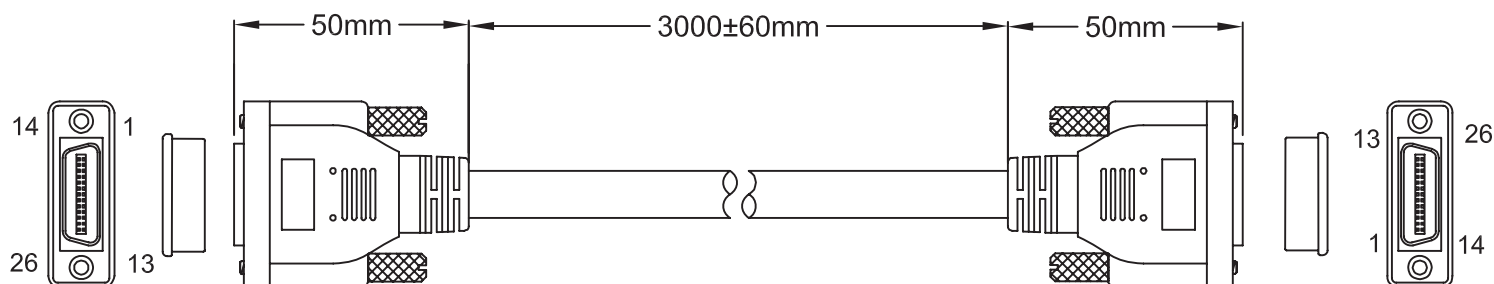

SPECIFICATION OF MATERIAL

1. END A

CONT. PLATING	Gold 15U"	MOLD No.	30.0039	SHIELD'G	Copper Foil
CONNECTOR TYPE	FMC26FL(S)XXX	T. SCREW	Jack Screw #4-40 Size:6.0X39.6mm		

2. END B

CONT. PLATING	Gold 15U"	MOLD No.	30.0039	SHIELD'G	Copper Foil
CONNECTOR TYPE	FMC26FL(S)XXX	T. SCREW	Jack Screw #4-40 Size:6.0X39.6mm		

3. WIRES

WIRE GAUGE	30Awg	LENGTH	3070+30-0mm	SHIELD'G	AB
CONDUCTORS	11TP	COLOR	Black	UL/CSA	UL20379
JACKET MAT'L	PVC	INS. MAT'L	Foam PE&PP	WIRE O.D.	9.5mm

4. SPECIAL REQUIREMENTS

- 4.1 Product requirement for Green environment protection:RoHS.
- 4.2 Overmold PVC is 60P , Black(RoHS).
- 4.3 Cover Overmold PVC is 60P , Black(RoHS).

* Standard Product


REV.	DATE	DESCRIPTION	BY
1.0	Apr/29/13'	D2820	Eve

DATE :	Apr/28/13'
P/N :	B0106439
Dwg NO. :	A07184
CUST. P/N :	MDR26P-SDR26P-0300-00
CUSTOMER :	
DESCRIPTION	MDR26P-SDR26P-0300-00
APPROVE:	

CONFIGURATION

END A

END B

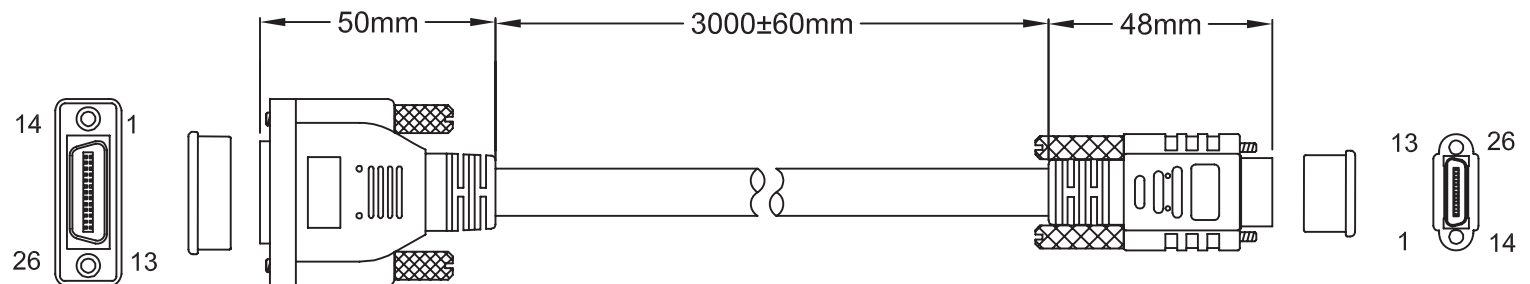

SPECIFICATION OF MATERIAL

1. END A

CONT. PLATING	Gold 15U"	MOLD No.	30.0039	SHIELD'G	Copper Foil
CONNECTOR TYPE	FMC26FL(S)XXX	T. SCREW	Jack Screw #4-40 Size:6.0X39.6mm		

2. END B

CONT. PLATING	Gold 15U"	MOLD No.	30.0040	SHIELD'G	Copper Foil
CONNECTOR TYPE	HDR-E26FSG1+	T. SCREW	Jack Screw M2X0.4 Size:5.0X47.5mm		

3. WIRES

WIRE GAUGE	30Awg	LENGTH	3070+30-0mm	SHIELD'G	AB
CONDUCTORS	11TP	COLOR	Black	UL/CSA	UL20379
JACKET MAT'L	PVC	INS. MAT'L	Foam PE&PP	WIRE O.D.	9.5mm

4. SPECIAL REQUIREMENTS

- 4.1 Product requirement for Green environment protection:RoHS.
- 4.2 Overmold PVC is 60P , Black(RoHS).
- 4.3 Cover Overmold PVC is 60P , Black(RoHS).

* Standard Product


REV.	DATE	DESCRIPTION	BY
1.0	Apr/29/13'	D2821	Eve

DATE :	Apr/28/13'
P/N :	B0106440
Dwg NO. :	A07185
CUST. P/N :	SDR26P-SDR26P-0300-00
CUSTOMER :	
DESCRIPTION	SDR26P-SDR26P-0300-00
APPROVE:	

CONFIGURATION

END A

END B

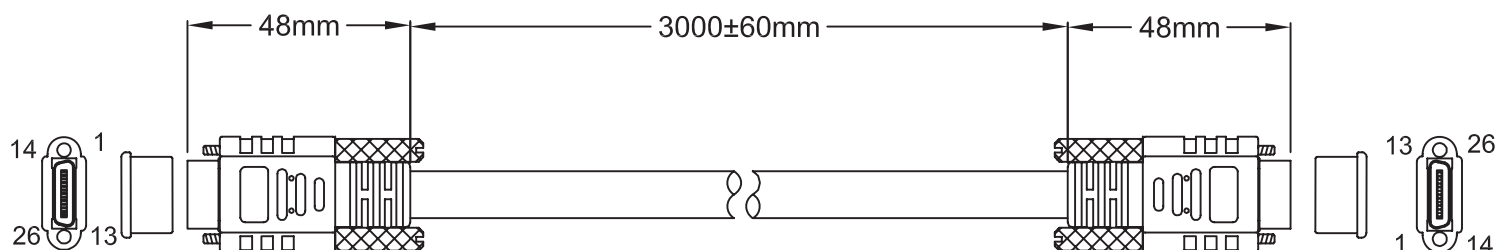

SPECIFICATION OF MATERIAL

1. END A

CONT. PLATING	Gold 15U"	MOLD No.	30.0040	SHIELD'G	Copper Foil
CONNECTOR TYPE	HDR-E26FSG1+	T. SCREW	Jack Screw M2X0.4 Size:5.0X47.5mm		

2. END B

CONT. PLATING	Gold 15U"	MOLD No.	30.0040	SHIELD'G	Copper Foil
CONNECTOR TYPE	HDR-E26FSG1+	T. SCREW	Jack Screw M2X0.4 Size:5.0X47.5mm		

3. WIRES

WIRE GAUGE	30Awg	LENGTH	3070+30-0mm	SHIELD'G	AB
CONDUCTORS	11TP	COLOR	Black	UL/CSA	UL20379
JACKET MAT'L	PVC	INS. MAT'L	Foam PE&PP	WIRE O.D.	9.5mm

4. SPECIAL REQUIREMENTS

- 4.1 Product requirement for Green environment protection:RoHS.
- 4.2 Overmold PVC is 60P , Black(RoHS).
- 4.3 Cover Overmold PVC is 60P , Black(RoHS).

* Standard Product