


# TEC1S-6.0-40.0-17/78

## industrial standard peltier element

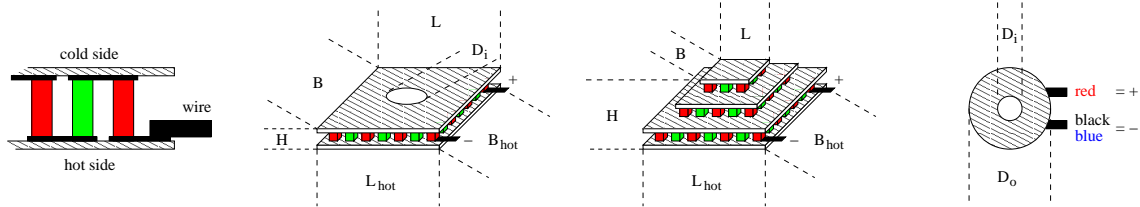

### thermal and electrical data:

thermal force:


$$\alpha_{300K} \quad 0.0131 \quad \frac{V}{K}$$

resistance:

$$\rho_{300K} \quad 0.517 \quad \Omega$$

thermal conductivity:

$$\gamma_{300K} \quad 0.128 \quad \frac{W}{K}$$

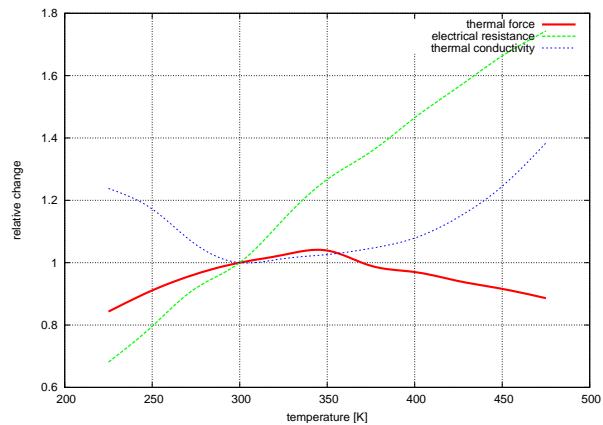

available maximum operating temperatures:  $T_{max}$  80, 120, 150(non-ROHS!), 200 °C  
 typical tolerances: ±5 %

### mechanical data:

size of cold side:

$$L \times B \times H \quad 6.0 \times 40.0 \times 3.10 \text{ mm}$$

size of hot side:

$$L_{hot} \times B_{hot} \quad 6.0 \times 40.0 \text{ mm}$$

height tolerance:

$$\Delta H \quad \pm 0.25 \text{ mm}$$

length and width tolerances:

$$\Delta L \text{ and } \Delta B \quad +0.5 / -0.2 \text{ mm}$$

weight:

$$m \quad 4 \text{ g}$$

ceramic plates:

BK-100 (grey), BK-96 (white) or AlN (opaque)

location of production:

Russia

### experimental data:

typical values at:

		$T_h = 50^\circ C:$	$T_h = 300 K:$
maximum cooling power:	$Q_{max}$	17.3 W	14.9 W
	at $\Delta T = 0$ and $I_{Q_{max}}$	8.2 A	7.6 A
maximum temperature difference:	$\Delta T_{max}$	77.8 K	69.0 K
	at $Q = 0$ and $I_{\Delta T_{max}}$	6.2 A	5.9 A
	$U_{max}$	4.2 V	3.9 V

### order information:

TEC1S-6.0-40.0-17/78-B: max. 80°C  
 TEC1S-6.0-40.0-17/78-C: max. 120°C  
 TEC1S-6.0-40.0-17/78-D: max. 150°C  
 TEC1S-6.0-40.0-17/78-G: max. 200°C

TEC1S-6.0-40.0-17/78-BS: sealed, max. 80°C  
 TEC1S-6.0-40.0-17/78-CS: sealed, max. 120°C  
 TEC1S-6.0-40.0-17/78-DS: sealed, max. 150°C  
 TEC1S-6.0-40.0-17/78-GS: sealed, max. 200°C