


SPECIFICATION OF THERMOELECTRIC MODULE CHILL

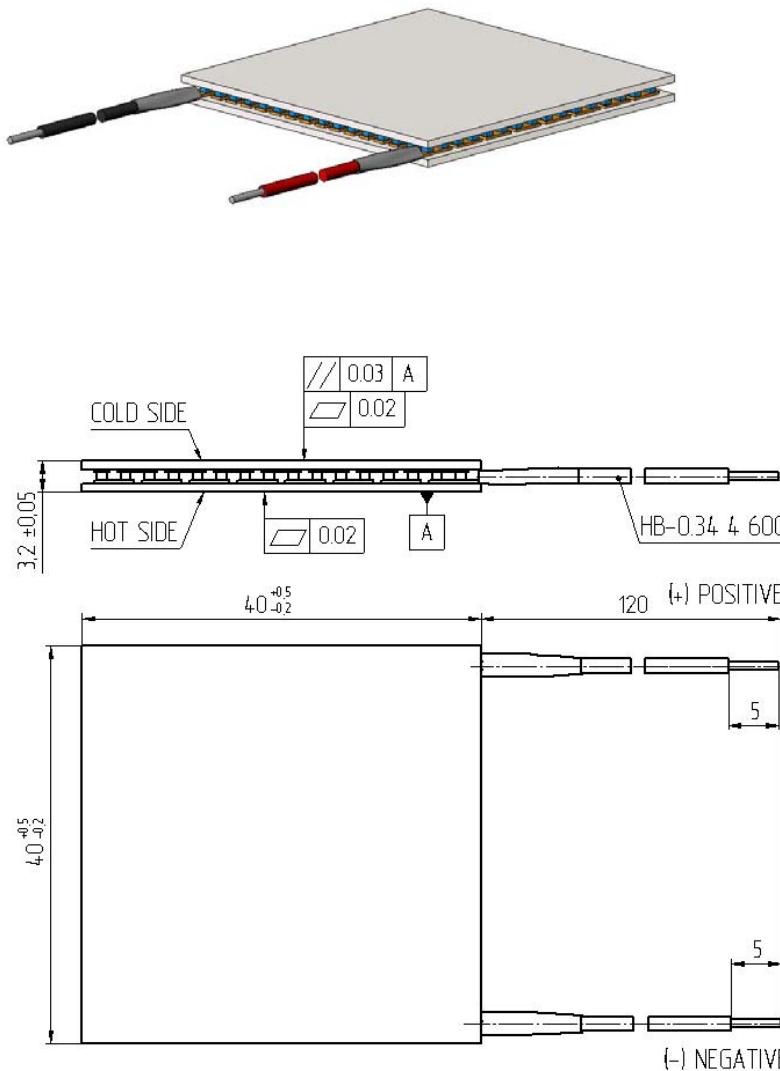

<i>Thermoelectrical parameters</i>	<i>Unit</i>	<i>Value</i>
I_{max}	Amps	5.8
U_{max}	Volts	15.7
ΔT_{max}	K	69
Q_{max}	Watts	56.0
R_{ac} (at 295 K)	Ohm	2.0
Tolerance	%	±10

All parameters except R_{ac} are given at Th=300 K

<i>Assembly parameters</i>	<i>Unit</i>	<i>Value</i>
Wires	HB-0.35 4 600	
Cross section	mm²	035
Metallization		Not
Sealing		-
Internal solder	°C	139
Brazing solder	°C	not

<i>Operational parameters</i>	<i>Unit</i>	<i>Value</i>
Working temperature range	°C	-50 ÷ +80
Max. processing temperature	°C	130
ROHS compliance		-

