
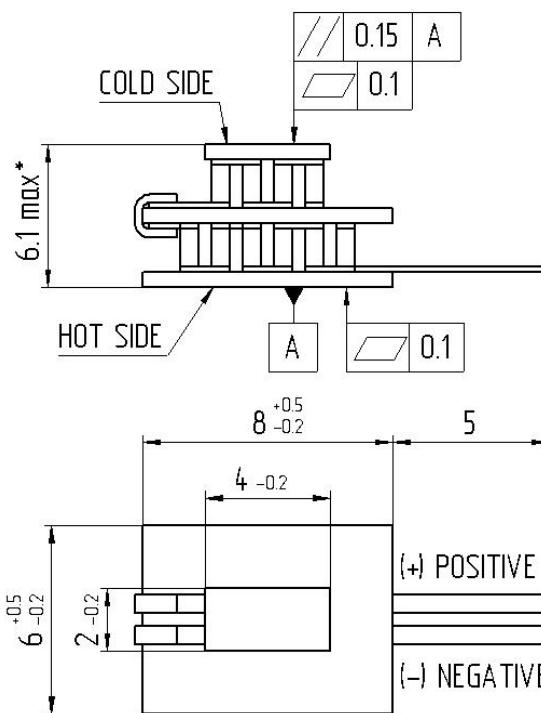
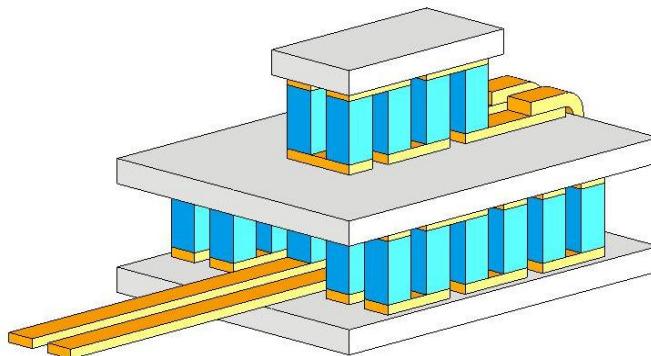


SPECIFICATION OF THERMOELECTRIC MODULE TB-2-(17-4)-1,2


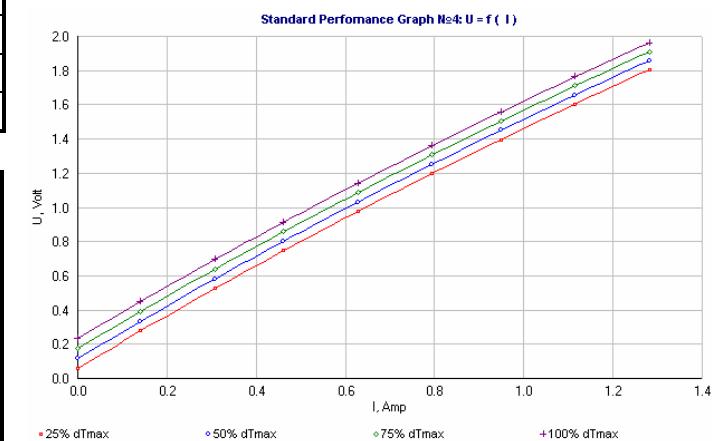
*Tolerance of the TEC's height for a lot is ± 0.35 mm

<i>Thermoelectric parameters</i>	<i>Unit</i>	<i>Value</i>
I _{max}	Amps	1,3
U _{max}	Volts	2,0
ΔT _{max}	K	93
R _{ac}	Ohm	1,5
Q _{max}	Watts	0,5
Tolerance	%	± 10

All parameters except R_{ac} are given at Th=300 K

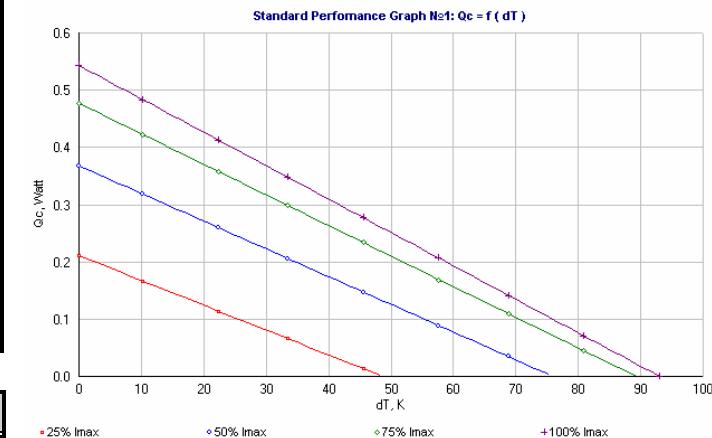

<i>Assembly parameters</i>	<i>Unit</i>	<i>Value</i>
Wires	-	-
Cross section	mm ²	-
Metallization	Not	-
Sealing	Not	-
Internal solder	°C	139
Brazing solder	°C	not



<i>Operation parameters</i>	<i>Unit</i>	<i>Value</i>
Working temperature range	°C	-50 \div +80
Max. processing temperature	°C	120
ROHS compliance	YES	-