
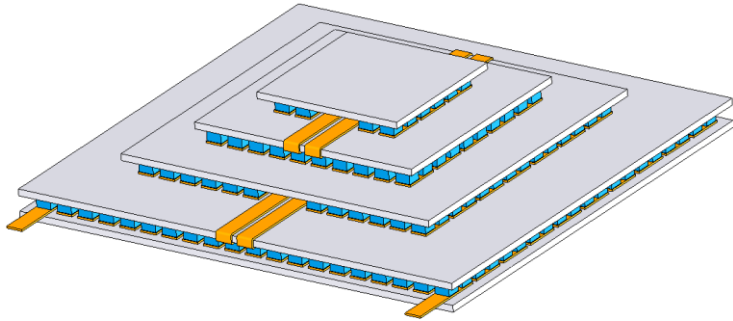


**SPECIFICATION OF THERMOELECTRIC MODULE TB-4-(199-97-49-17)-1.5**


<i>Thermoelectric parameters</i>	<i>Unit</i>	<i>Value</i>
<b>I<sub>max</sub></b>	<b>A</b>	<b>6.7</b>
<b>U<sub>max</sub></b>	<b>V</b>	<b>23.6</b>
<b>ΔT<sub>max</sub></b>	<b>K</b>	<b>111</b>
<b>Q<sub>max</sub></b>	<b>W</b>	<b>16.9</b>
<b>R<sub>ac</sub>(at 295 K)</b>	<b>Ohm</b>	<b>3.42</b>
<b>Tolerance</b>	<b>%</b>	<b>±10</b>

*All parameters except R<sub>ac</sub> are given at Th=300 K*

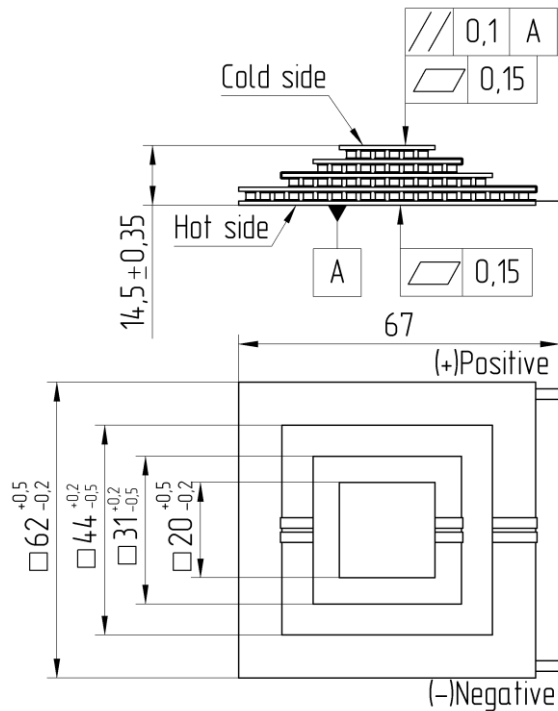

<i>Assembly parameters</i>	<i>Unit</i>	<i>Value</i>
<b>Wires</b>		<b>-</b>
<b>Cross section</b>	<b>mm<sup>2</sup></b>	<b>-</b>
<b>Metallization</b>		<b>Not</b>
<b>Sealing</b>		<b>Not</b>
<b>Internal solder</b>	<b>°C</b>	<b>139</b>
<b>Brazing solder</b>	<b>°C</b>	<b>not</b>

<i>Operation parameters</i>	<i>Unit</i>	<i>Value</i>
<b>Working temperature range</b>	<b>°C</b>	<b>-50 ÷ +80</b>
<b>Max. processing temperature</b>	<b>°C</b>	<b>130</b>
<b>ROHS compliance</b>		<b>YES</b>