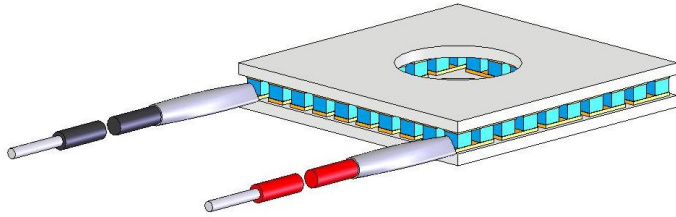


SPECIFICATION OF THERMOELECTRIC MODULE TB-41-1,4-1,1CH


Thermoelectric parameters	Unit	Value
I_{max}	Amps	8,3
U_{max}	Volts	5,1
ΔT_{max}	K	69
Q_{max}	Watts	25,9
R_{ac} (at 295 K)	Ohm	0,45
Tolerance	%	±10

All parameters except R_{ac} are given at Th=300 K

Assembly parameters	Unit	Value
Wires	HB-0.35 4 600	
Cross section	mm²	0.35
Metallization		Not
Sealing		Not
Internal solder	°C	139
Brazing solder	°C	Not

Operation parameters	Unit	Value
Working temperature range	°C	-50 ÷ +80
Max. processing temperature	°C	120
ROHS compliance		YES

