


thermo electrical generator

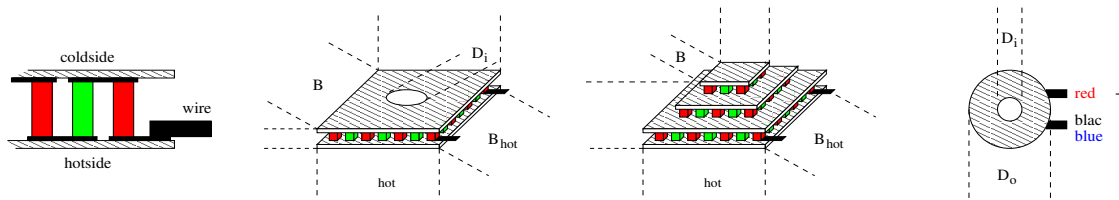


thermal and electrical data:

thermal force:	α	0.0516	$\frac{V}{K}$
resistance:	ρ	0.673	Ω
thermal conductivity:	γ	1.90	$\frac{W}{K}$
available maximum operating temperatures:	T_{max}	200	$^{\circ}C$
tolerances:		$\pm 10\%$	

mechanical data:

size of cold side:	$L \times B \times H$	50.0 × 50.0 × 3.30 mm
size of hot side:	$L_{hot} \times B_{hot}$	50.0 × 50.0 mm
height tolerance:	ΔH	± 0.5 mm
length and width tolerances:	ΔL and ΔB	± 1.0 mm
weight:	m	38 g
ceramic plates:		BK-100 (grey) or BK-96 (white)

location of production: china

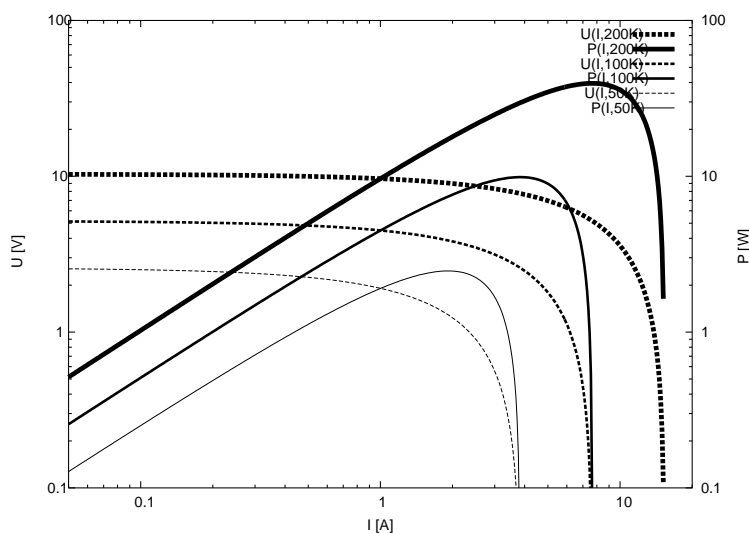

order information:

part number	maximum operating temperature	modification	internal code
TEG2-50-50-40/200	200 $^{\circ}C$	sealed	xx.xx.xxxx

Internal code is for reference only. Do not use this code for orders!

Note: Some or all of the above parts may only be available in OEM quantities.

Consult the factory for information about minimum order quantities: info@eureca.de