




| 1.1" 1.8/25mm C                           |            | 1.1"                | 1"         | 2/3"               |
|-------------------------------------------|------------|---------------------|------------|--------------------|
| FOCAL LENGTH                              |            | f=25mm              |            |                    |
| F-NUMBER                                  |            | F=1.8-16            |            |                    |
| PICTURE SIZE                              |            | 10.6x14.1mm         | 9.6x12.8mm | 6.6x8.8mm          |
| ANGLE OF VIEW<br>(∞)                      | VER. ANGLE | 23.9°               | 21.7°      | 15.0°              |
|                                           | HOR. ANGLE | 31.5°               | 28.7°      | 20.0°              |
|                                           | DIA. ANGLE | 38.8°               | 35.5°      | 24.8°              |
| DISTORTION (TV)                           |            | -0.3%               | -0.2%      | -0.1%              |
| FIELD OF VIEW<br>(MINIMUM FOCUS DISTANCE) | VER.       | 48mm                | 44mm       | 30mm               |
|                                           | HOR.       | 64mm                | 58mm       | 40mm               |
|                                           | DIA.       | 80mm                | 73mm       | 50mm               |
| MINIMUM FOCUS DISTANCE                    |            | 0.1m                |            |                    |
| FLANGE BACK                               |            | 17.526mm in air     |            |                    |
| BACK FOCUS                                |            | 13.3mm in air       |            |                    |
| FILTER SCREW SIZE                         |            | M35.5x0.5           |            |                    |
| FRONT/REAR EFFECTIVE DIA.                 |            | FRONT $\phi$ 29.0mm |            | REAR $\phi$ 18.4mm |
| MOUNT                                     |            | C-MOUNT             |            |                    |
| EXIT PUPIL                                |            | -67.7mm             |            |                    |
| TEMPERATURE RANGE                         |            | -10~+50°C           |            |                    |
| STORAGE TEMPERATURE RANGE                 |            | -20~+60°C           |            |                    |
| RESOLUTION CENTER/CORNER                  |            | CENTER 160lp/mm     |            | CORNER 100lp/mm    |
| WEIGHT                                    |            | 220g                |            |                    |

NOTE: Specifications and availability are subject to change without notice  
 注) 本仕様については、予告なしに変更する場合があります。

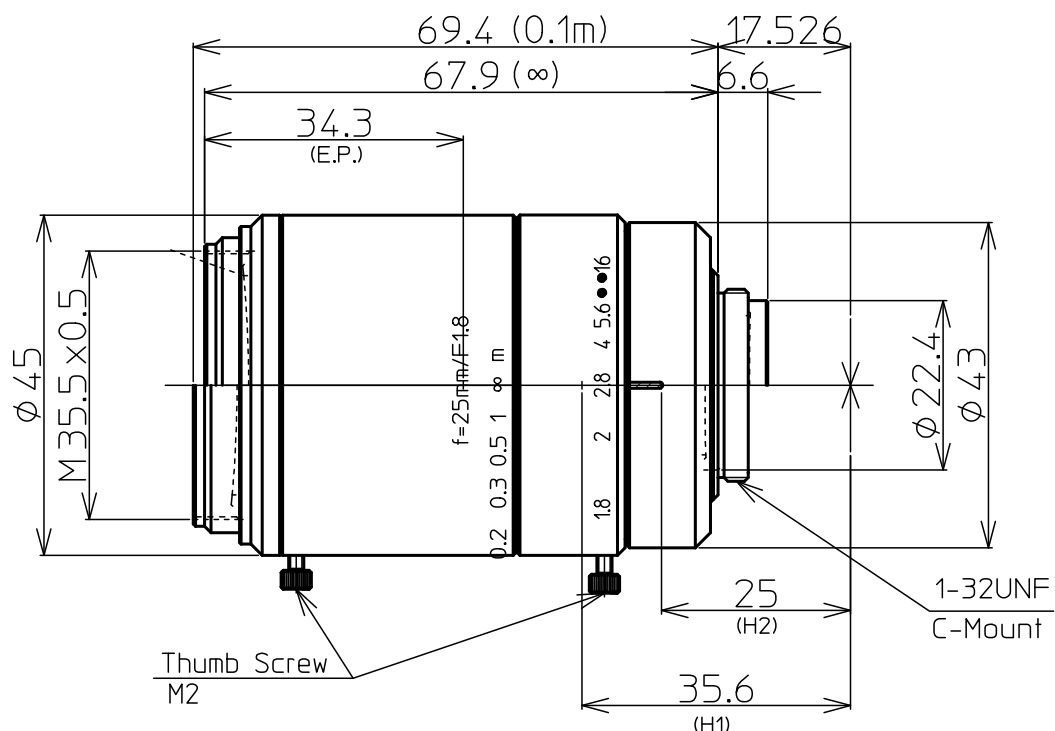

|            |       |     |                  |      |        |
|------------|-------|-----|------------------|------|--------|
|            |       | 尺度  | 1/1              | 工場番号 | LM25FC |
|            |       | 機種名 | 1.1" F1.8 f=25mm |      |        |
|            |       | 機種番 | LM25FC 外観図       |      |        |
| 2017.09.15 | 作成年月日 |     |                  |      |        |