


BLACKFLY[®]S

BFS-PGE-16S2


Measurements are taken based on guidelines in the EMVA 1288 standard; the full definition can be found at EMVA.org. Camera settings are: maximum bit depth, 16-bit pixel format, and ISP disabled. The center wavelength is 525 nm unless otherwise noted. Results are captured at room temperature (20°C).

	Blackfly S BFS-PGE-16S2M	Blackfly S BFS-PGE-16S2C
Resolution	1440x1080	1440x1080
Sensor	Sony IMX273, CMOS, 1/2.9	Sony IMX273, CMOS, 1/2.9
Pixel Size (µm)	3.45	3.45
Firmware Version	2305.0.146.0	2305.0.146.0
ADC Bit Depth	12	12
Quantum Efficiency Mono (% at 525 nm)	63.24	N/A
Quantum Efficiency Blue (% at 470 nm)	N/A	48.02
Quantum Efficiency Green (% at 525 nm)	N/A	57.93
Quantum Efficiency Red (% at 630 nm)	N/A	45.34
Temporal Dark Noise (Read Noise) (e-)	2.26	2.18
Temporal Dark Noise (Read Noise) (DN)	14.00	13.75
Signal to Noise Ratio Maximum (dB)	40.21	40.23
Signal to Noise Ratio Maximum (Bits)	6.68	6.68
Absolute Sensitivity Threshold (γ)	4.57	4.87
Absolute Sensitivity Threshold (e-)	2.89	2.81
Saturation Capacity (Well Depth) (e-)	10499	10546
Saturation Capacity (Well Depth) (γ)	16603	18264
Dynamic Range (dB)	71.20	71.49
Dynamic Range (Bits)	11.83	11.87
Gain (e-/ADU)	0.17	0.17

Blackfly S BFS-PGE-16S2M Spectral Response Curve

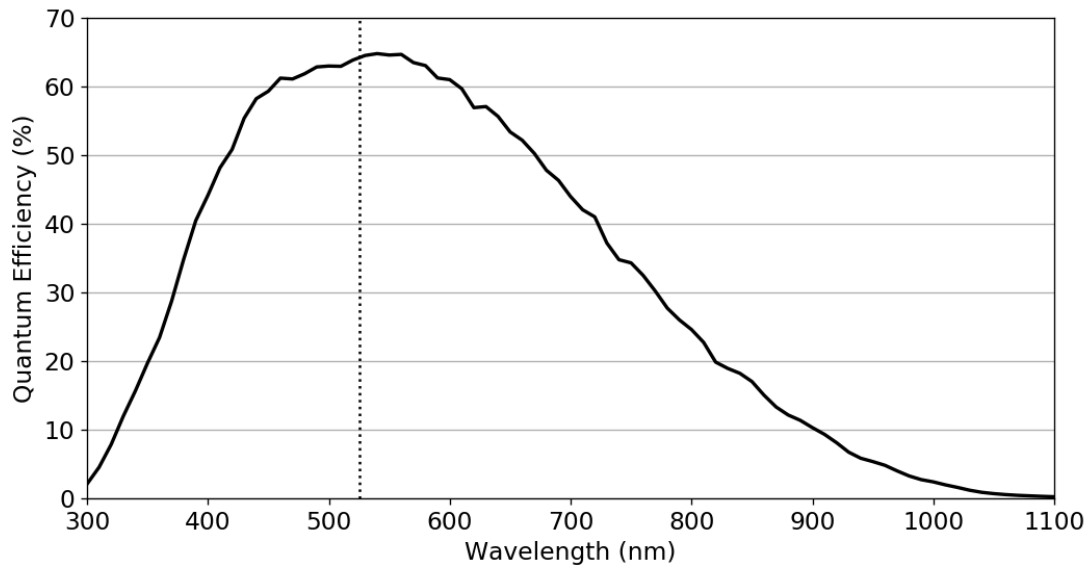

Blackfly S BFS-PGE-16S2C Spectral Response Curve

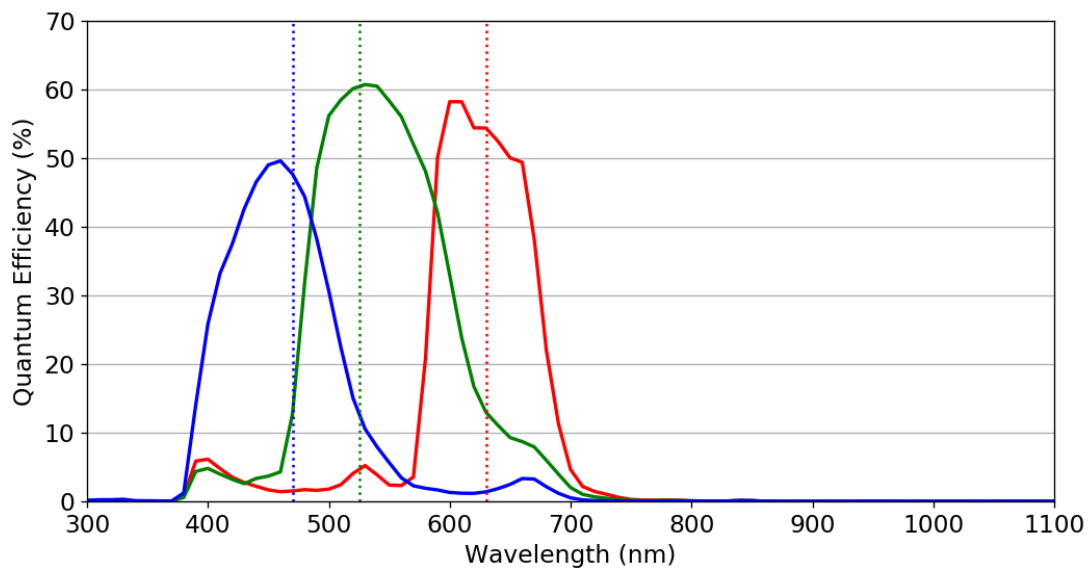

6/2/2023

Names and marks appearing on the products herein are either registered trademarks or trademarks of FLIR Integrated Imaging Solutions Inc. and/or its subsidiaries.

© 2016-2023 FLIR Integrated Imaging Solutions Inc. All rights reserved.