

# EMVA 1288 IMAGING PERFORMANCE


## FLIR BLACKFLY<sup>®</sup>S

### BFS-U3-89S6

Measurements are taken based on guidelines in the EMVA 1288 standard; the full definition can be found at EMVA.org. Camera settings are: maximum bit depth, 16-bit pixel format, and ISP disabled. The center wavelength is 525 nm unless otherwise noted. Results are captured at room temperature (20°C). Using FLIR test software version 4.0.

	BFS-U3-89S6M	BFS-U3-89S6C
<b>Resolution</b>	4096 x 2160	4096 x 2160
<b>Sensor</b>	Sony IMX255, CMOS, 1"	Sony IMX255, CMOS, 1"
<b>Pixel Size (µm)</b>	3.45	3.45
<b>Firmware</b>	1707.1.9.0	1707.1.9.0
<b>ADC</b>	12-bit	12-bit
<b>Quantum Efficiency Mono (% at 530 nm)</b>	63	N/A
<b>Quantum Efficiency Blue (% at 460 nm)</b>	N/A	46
<b>Quantum Efficiency Green (% at 530 nm)</b>	N/A	56
<b>Quantum Efficiency Red (% at 625 nm)</b>	N/A	46
<b>Temporal Dark Noise (Read Noise) (e-)</b>	2.47	2.50
<b>Temporal Dark Noise (Read Noise) (DN)</b>	14.33	14.27
<b>Signal to Noise Ratio Maximum (dB)</b>	40.22	40.43
<b>Signal to Noise Ratio Maximum (Bits)</b>	6.68	6.72
<b>Absolute Sensitivity Threshold (γ)</b>	4.72	5.32
<b>Absolute Sensitivity Threshold (e-)</b>	2.97	3.00
<b>Saturation Capacity (Well Depth) (e-)</b>	10514	11038
<b>Saturation Capacity (Well Depth) (γ)</b>	16692	19611
<b>Dynamic Range (dB)</b>	70.97	71.33
<b>Dynamic Range (Bits)</b>	11.79	11.85
<b>Gain (e-/ADU)</b>	0.17	0.17

## BFS-U3-89S6M

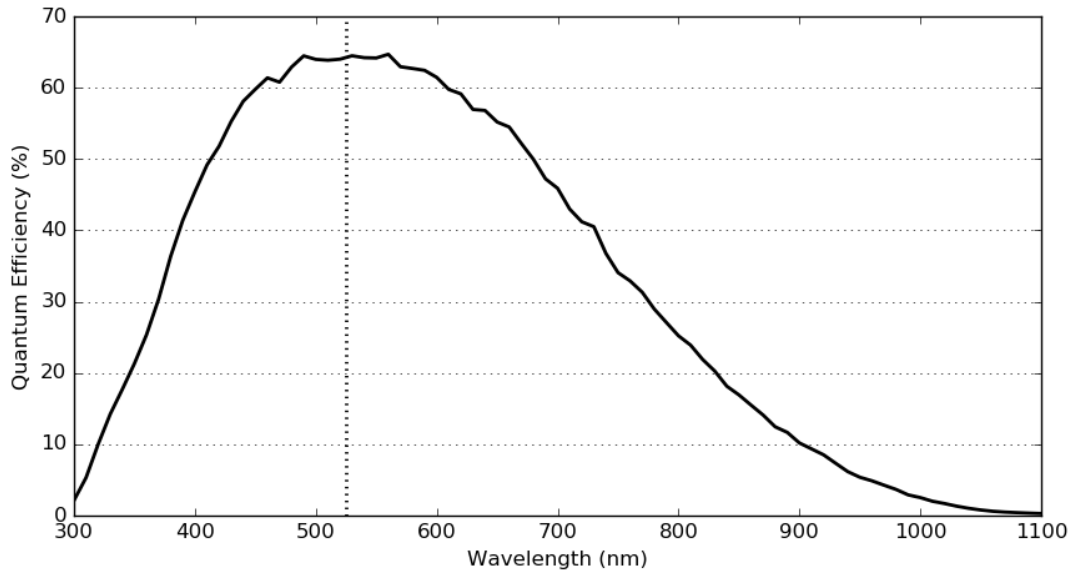

## BFS-U3-89S6C

