


## *FIREFLY<sup>®</sup>* *FFY-U3-16S2-DL*

Measurements are taken based on guidelines in the EMVA 1288 standard; the full definition can be found at [EMVA.org](http://EMVA.org). Camera settings are: maximum bit depth, 16-bit pixel format, and ISP disabled. The center wavelength is 525 nm unless otherwise noted. Results are captured at room temperature (20°C).

	Firefly FFY-U3-16S2M-DL	Firefly FFY-U3-16S2C-DL
<b>Resolution</b>	1440x1080	1440x1080
<b>Sensor</b>	Sony IMX296, CMOS, 1/2.9	Sony IMX296, CMOS, 1/2.9
<b>Pixel Size (µm)</b>	3.45	3.45
<b>Firmware Version</b>	1905.4.103.0	1905.4.103.0
<b>ADC Bit Depth</b>	10	10
<b>Quantum Efficiency Mono (% at 525 nm)</b>	64.28	N/A
<b>Quantum Efficiency Blue (% at 470 nm)</b>	N/A	47.81
<b>Quantum Efficiency Green (% at 525 nm)</b>	N/A	57.41
<b>Quantum Efficiency Red (% at 630 nm)</b>	N/A	44.90
<b>Temporal Dark Noise (Read Noise) (e-)</b>	4.69	4.95
<b>Temporal Dark Noise (Read Noise) (DN)</b>	0.44	0.47
<b>Signal to Noise Ratio Maximum (dB)</b>	40.12	40.17
<b>Signal to Noise Ratio Maximum (Bits)</b>	6.66	6.67
<b>Absolute Sensitivity Threshold (γ)</b>	8.08	9.54
<b>Absolute Sensitivity Threshold (e-)</b>	5.19	5.45
<b>Saturation Capacity (Well Depth) (e-)</b>	10276	10408
<b>Saturation Capacity (Well Depth) (γ)</b>	15986	18209
<b>Dynamic Range (dB)</b>	65.93	65.61
<b>Dynamic Range (Bits)</b>	10.95	10.90
<b>Gain (e-/ADU)</b>	10.74	10.62

## Firefly FFY-U3-16S2M-DL Spectral Response Curve

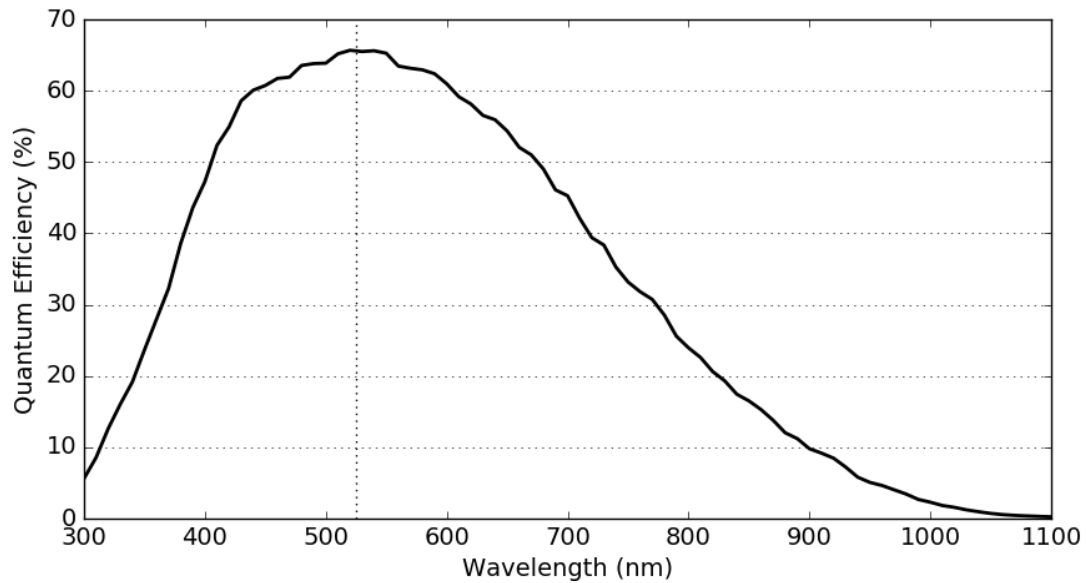

## Firefly FFY-U3-16S2C-DL Spectral Response Curve

