





Model	Color	Current	Power	Mode
OPT-CFLG22658-UV	Ultraviolet (365nm)	15A	360W	Strobe
OPT-CFLG22658-UV	Ultraviolet (365nm)	7A	168W	Continuous
OPT-CFLG22658-UV	Ultraviolet (385nm)	15A	360W	Strobe
OPT-CFLG22658-UV	Ultraviolet (385nm)	7A	168W	Continuous
OPT-CFLG22658-UV	Ultraviolet (405nm)	15A	360W	Strobe
OPT-CFLG22658-UV	Ultraviolet (405nm)	7A	168W	Continuous

WS 28K7Z, M30x1.0, 7 Pin
or Compactible Connector



Pin	Pin Definition
1	Light +
2	Light -
3	Fan +
4	Fan -
5	NC*
6	NC*
7	NC

* DO NOT CONNECT ANY COMPONENT

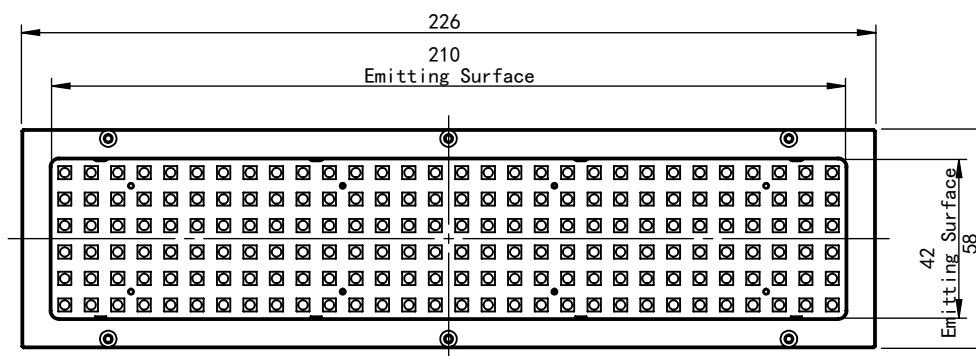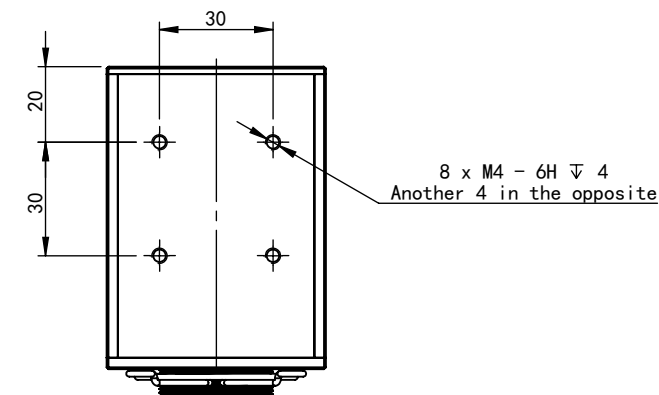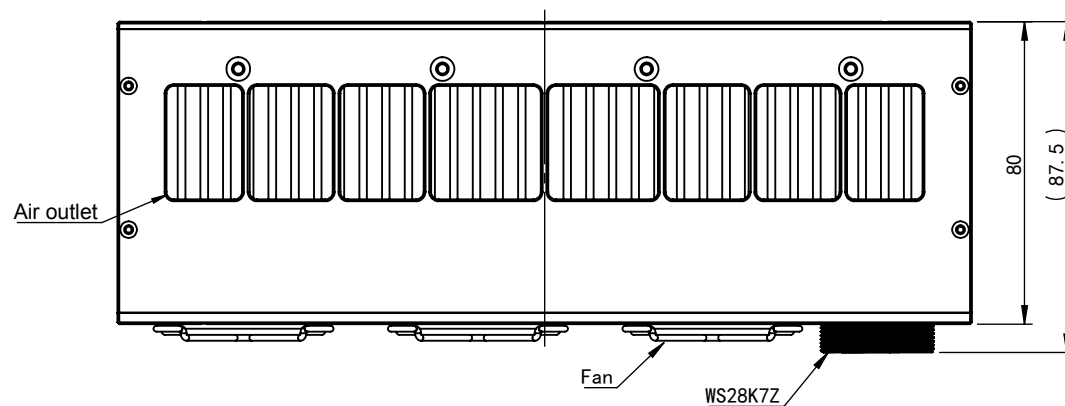

Copyright © 2011 by OPT All Rights Reserved		View Angle		Standard Difference	IT14	Remark 1.Advised Working Distance: 10mm 2.stroboscopic working:Maximum pulse width 30s, duty ratio 50%; 3.continuous working: The controller gear 120; 4.Light source using with 3 meters extension cords. 5.Advised Controller: OPT-DPA20024	 OPT MACHINE VISION OPT-CFLG22658-UV	
		Paper Size	A4	Scale	1:2			
Drawing Code	KFBZ20190520KF0701	Drawing Date	2017/5/22	Revised Date	2019/6/5	Version		V1.0