

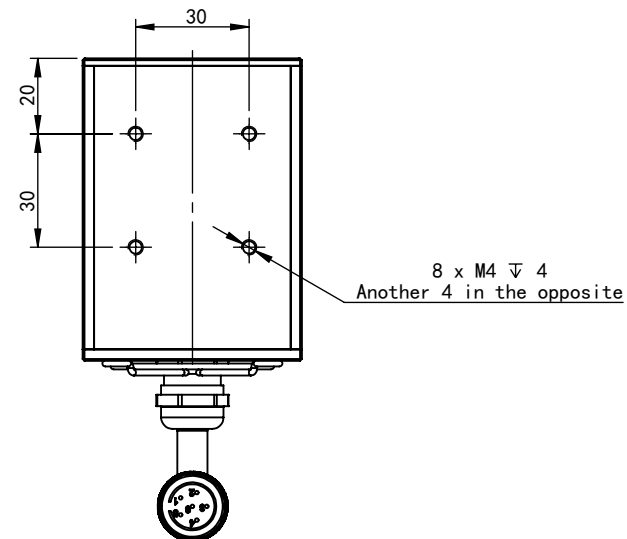
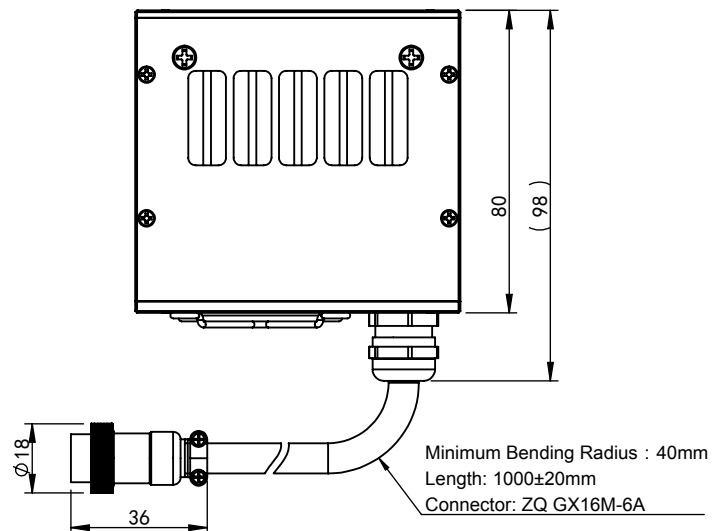


Model	Color	Current	Power	Mode
OPT-CFLG8658-UV	Ultraviolet (365nm)	5A	120W	Strobe
OPT-CFLG8658-UV	Ultraviolet (365nm)	2.35A	56.4W	Continuous
OPT-CFLG8658-UV	Ultraviolet (385nm)	5A	120W	Strobe
OPT-CFLG8658-UV	Ultraviolet (385nm)	2.35A	56.4W	Continuous
OPT-CFLG8658-UV	Ultraviolet (405nm)	5A	120W	Strobe
OPT-CFLG8658-UV	Ultraviolet (405nm)	2.35A	56.4W	Continuous

ZQ GX16M-6A, M16x1.0, 6 Pin or Compatible Connector		Pin	Pin Definition
		1	Light +
		2	Light -
		3	Fan +
		4	Fan -
		5	NC*
		6	NC*
* DO NOT CONNECT ANY COMPONENT			



Copyright © 2011 by OPT All Rights Reserved	View Angle		Standard Difference	IT14	Remark 1.stroboscopic working: Maximum pulse width 30s, duty ratio 50%; 2.continuous working: The controller gear 120; 3.Advised Controller: OPT-APA6024 OPT-DPA6024	 OPT MACHINE VISION
	Paper Size	A ₄	Scale	1:2		
Drawing Code	KFBZ20190520KF0701	Drawing Date	2017/5/22	Revised Date	2019/6/9	OPT-CFLG8658-UV Version V1.0