


professional low cost peltier element

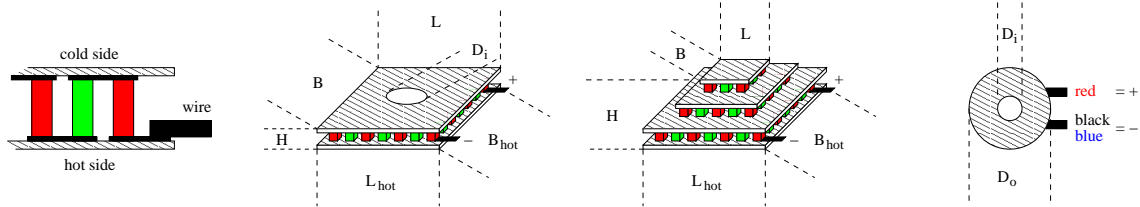


thermal and electrical data:

thermal force:

resistance:

thermal conductivity:

α_{300K}	0.0512	$\frac{V}{K}$
ρ_{300K}	2.37	Ω
γ_{300K}	0.469	$\frac{W}{K}$

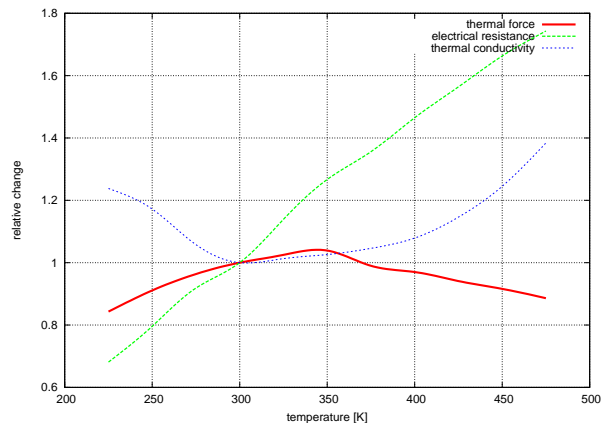

available maximum operating temperatures: T_{max}

125, 150, 200, 250 °C

tolerances:

±15%

mechanical data:

size of cold side:

$L \times B \times H$ 30.0 × 30.0 × 2.90 mm

size of hot side:

$L_{hot} \times B_{hot}$ 30.0 × 30.0 mm

height tolerance:

ΔH ±0.5 mm

length and width tolerances:

ΔL and ΔB ±1.0 mm

weight:

m 13 g

ceramic plates:

BK-100 (grey), BK-96 (white) or AlN (opaque)

location of production:

China

experimental data:

typical values at:

		$T_h = 50^\circ C:$	$T_h = 300 K:$
maximum cooling power:	Q_{max}	57.6 W	49.7 W
	at $\Delta T = 0$ and $I_{Q_{max}}$	7.0 A	6.5 A
maximum temperature difference:	ΔT_{max}	73.4 K	65.0 K
	at $Q = 0$ and $I_{\Delta T_{max}}$	5.4 A	5.1 A
	U_{max}	16.5 V	15.4 V

order information:

TEC2L-30-30-58/73-CS: sealed, max. 125°C
 TEC2L-30-30-58/73-DS: sealed, max. 150°C
 TEC2L-30-30-58/73-FS: sealed, max. 200°C
 TEC2L-30-30-58/73-HS: sealed, max. 250°C